
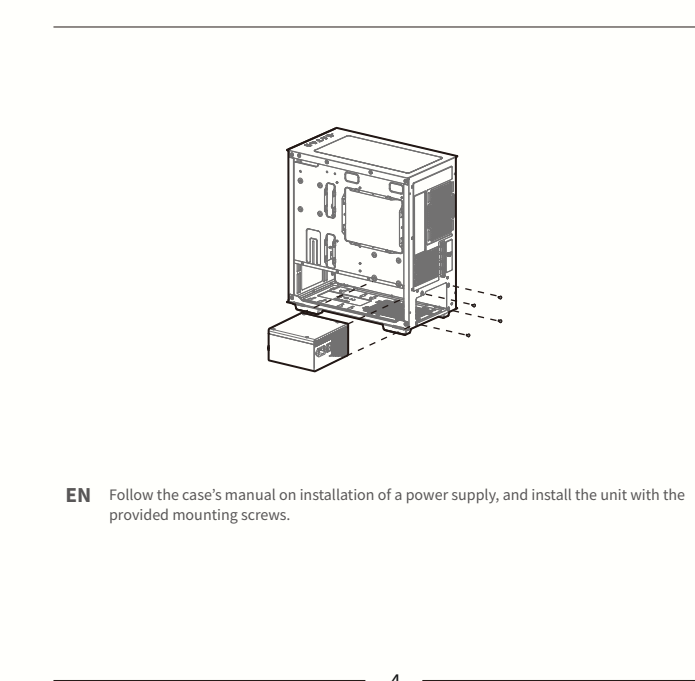
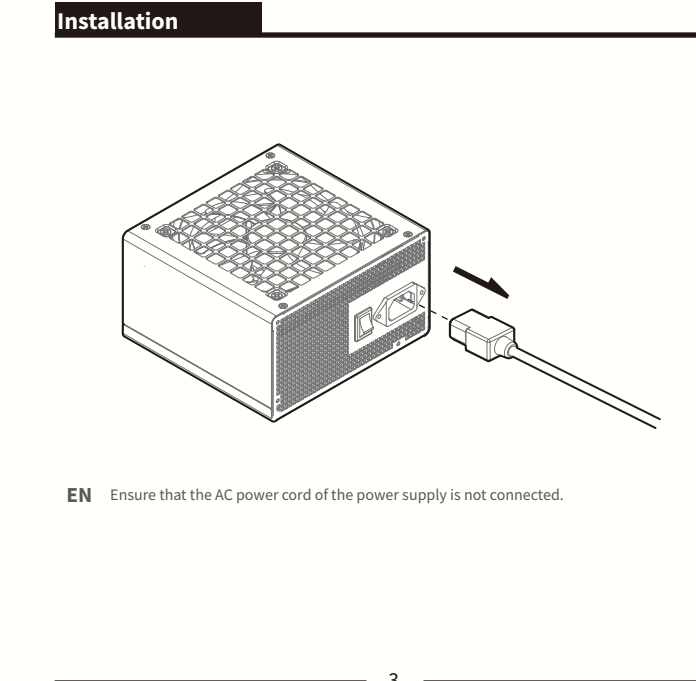
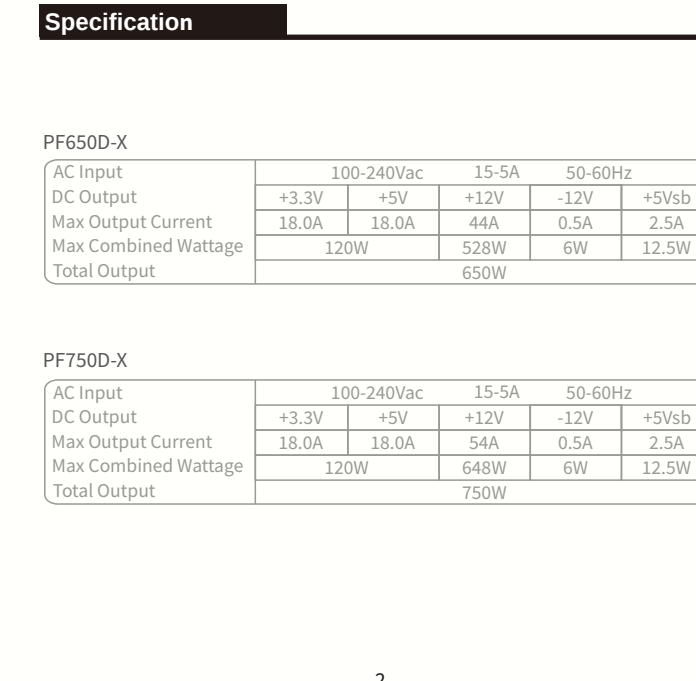
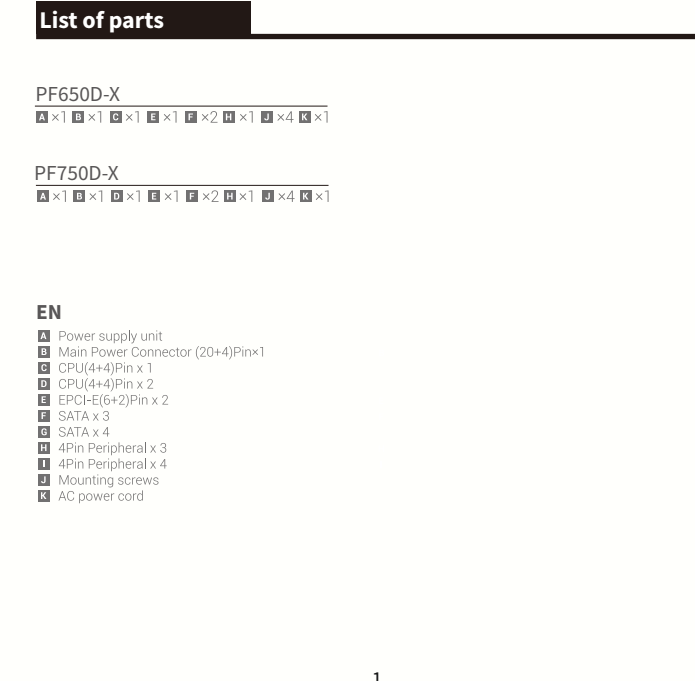
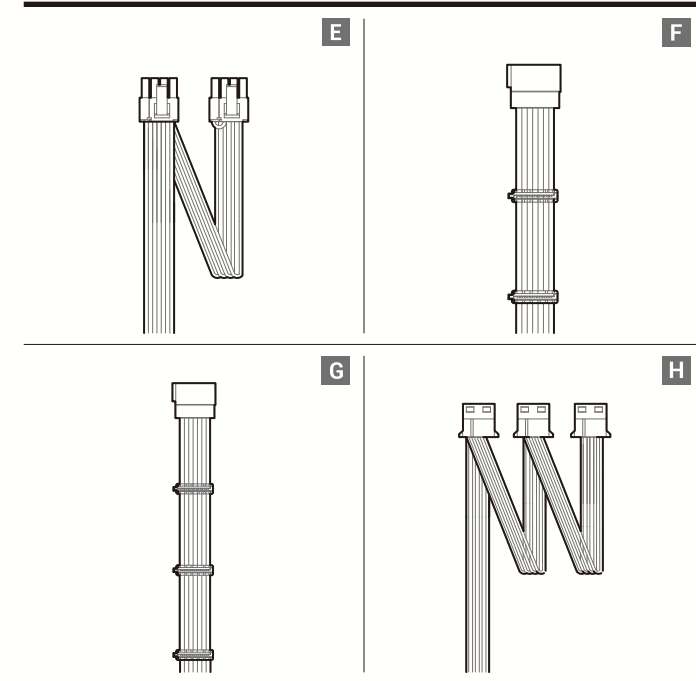


PF Series

ATX POWER SUPPLY

PF650D-X
PF750D-X

projectX

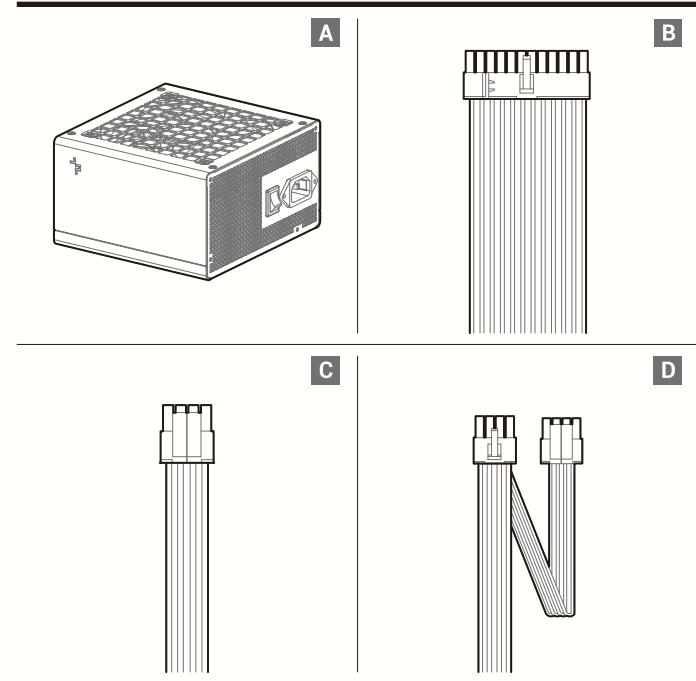

List of parts

PF650D-X
A x1 B x1 C x1 E x1 F x2 H x1 I x4 K x1

PF750D-X
A x1 B x1 D x1 E x1 F x2 H x1 I x4 K x1

EN

- A Power supply unit
- B Main Power Connector (20+4)Pinx1
- C CPU(4+4)Pin x 1
- D CPU(4+4)Pin x 2
- E EPCI-E(6+2)Pin x 2
- F SATA x 3
- G SATA x 4
- H 4Pin Peripheral x 3
- I 4Pin Peripheral x 4
- J Mounting screws
- K AC power cord

Specification


PF650D-X

AC Input	100-240Vac		15-5A	50-60Hz	
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max Output Current	18.0A	18.0A	44A	0.5A	2.5A
Max Combined Wattage	120W		528W	6W	12.5W
Total Output	650W				


PF750D-X

AC Input	100-240Vac		15-5A	50-60Hz	
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max Output Current	18.0A	18.0A	54A	0.5A	2.5A
Max Combined Wattage	120W		648W	6W	12.5W
Total Output	750W				






Installation

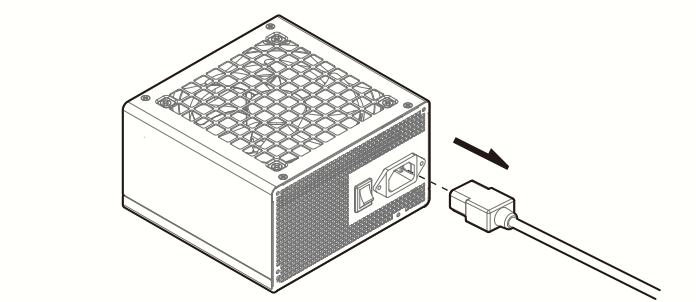

EN Ensure that the AC power cord of the power supply is not connected.

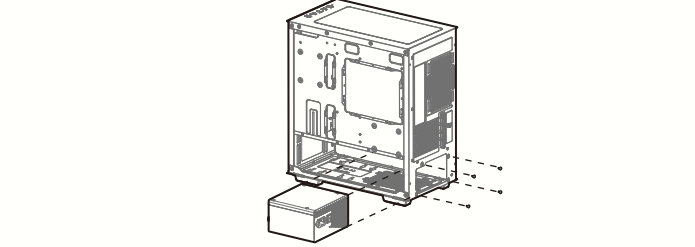

EN Follow the case's manual on installation of a power supply, and install the unit with the provided mounting screws.

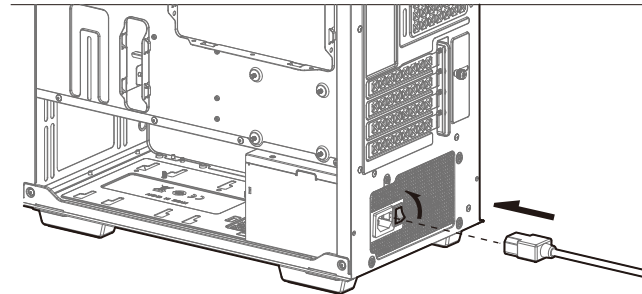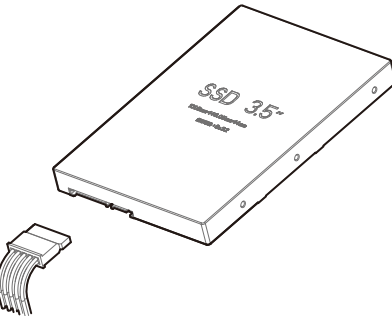

EN For more information, please check our website at: www.projectxpc.com